

6 x 3W LED LIGHT HEAD INSTALLATION INSTRUCTIONS

Connecting Diagram:

Red Wire: Power(+) 12-24VDC

Black Wire: Ground(-)

Yellow Wire: Flash Pattern Set and Synchronization

White Wire: Alternate Flashing


Specifications:

Size: 112(L) x 28(W) x 9(H)mm


Input Voltage: 12-24 VDC ; Current Peak 1.4 Amps@12V

Clear lens. Aluminum Base. IP68

1. For One Unit:

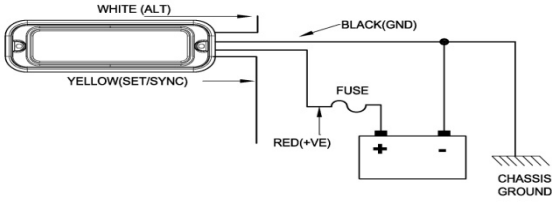

2. For Two Units:

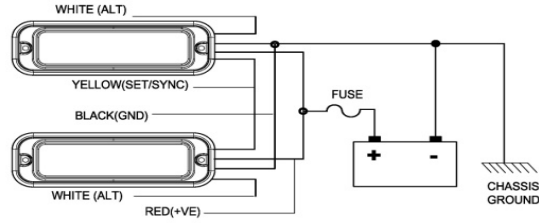

Function:

A. To select Flash Pattern: Apply +12V or +24V to touch YELLOW wire:

→ for less than 1 second for next pattern; for more than 5 seconds for reset

B. For Synchronization & Flash Patterns:

→ Connect YELLOW wires of all heads together for synchronization; All heads must be set at the same pattern

C. For Simultaneous or Alternating Flash:

→ Group 1 Heads: (Wiring-WHITE connected to RED) will flash together

→ Group 2 Heads: (Wiring-WHITE not connected to RED) will flash together ※Group 1 Heads will alternate with Group 2

No.	Flash Pattern	No.	Flash Pattern	No.	Flash Pattern	No.	Flash Pattern
0	Random (default)	5	Mega (split)	10	Single (all) 60FPM	15	Ultra (all)
1	Single (split)	6	Ultra (split)	11	Double (all)	16	Single-Quad (all)
2	Double (split)	7	Single-Quad (split)	12	Quad (all)	17	Single H/L (all)
3	Quad (split)	8	Single H/L (split)	13	Quint (all)	18	Steady 2 (California)
4	Quint (split)	9	Single (all) 120 FPM	14	Mega (all)	19	Steady 4 (all)

6 x 3W LED LIGHT HEAD INSTALLATION INSTRUCTIONS

Connecting Diagram:

Red Wire: Power(+) 12-24VDC

Black Wire: Ground(-)

Yellow Wire: Flash Pattern Set and Synchronization

White Wire: Alternate Flashing


Specifications:

Size: 112(L) x 28(W) x 9(H)mm


Input Voltage: 12-24 VDC ; Current Peak 1.4 Amps@12V

Clear lens. Aluminum Base. IP68

1. For One Unit:

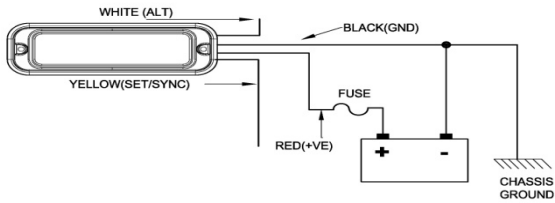

2. For Two Units:

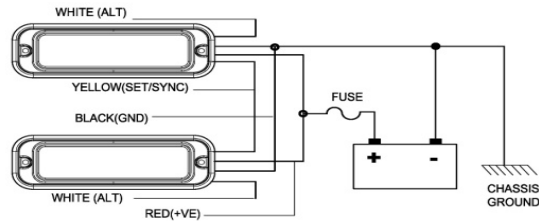

Function:

A. To select Flash Pattern: Apply +12V or +24V to touch YELLOW wire:

→ for less than 1 second for next pattern; for more than 5 seconds for reset

B. For Synchronization & Flash Patterns:

→ Connect YELLOW wires of all heads together for synchronization; All heads must be set at the same pattern

C. For Simultaneous or Alternating Flash:

→ Group 1 Heads: (Wiring-WHITE connected to RED) will flash together

→ Group 2 Heads: (Wiring-WHITE not connected to RED) will flash together *Group 1 Heads will alternate with Group 2

No.	Flash Pattern	No.	Flash Pattern	No.	Flash Pattern	No.	Flash Pattern
0	Random (default)	5	Mega (split)	10	Single (all) 60 FPM	15	Ultra (all)
1	Single (split)	6	Ultra (split)	11	Double (all)	16	Single-Quad (all)
2	Double (split)	7	Single-Quad (split)	12	Quad (all)	17	Single H/L (all)
3	Quad (split)	8	Single H/L (split)	13	Quint (all)	18	Steady 2 (California)
4	Quint (split)	9	Single (all) 120 FPM	14	Mega (all)	19	Steady 4 (all)